

BPC-iMX93-01 Industrial Computer



BPC-iMX93-01 Industrial Computer



Overview:

BPC-iMX93-01 is a fanless mini box pc utilizing DEBIX Model C SBC for default. It's an easy to use computer with an external Wi-Fi&BT antenna, a 5V DC power adapter and a Micro SD card pre-installed with the image (eMMC optional). Insert the Micro SD card, press the ON/OFF button, then you power it on.

Main Features:


- Compact size, durable aluminum alloy case
- Fanless design with increased surface area for enhanced heat dissipation
- Dual-Gigabit Ethernet network and two USB 2.0 to bring an efficient data transmission speed
- 1 x 3.5mm headphone and mic combo
- 1 x Wi-Fi&BT antenna
- With NXP i.MX 93 processor 1.7GHz and a full load power consumption of 1W
- For IoT edge, contactless HMI, smart home, building control and industrial applications
- Supports system switching between Ubuntu, Yocto and Debian

Specification:

System	
Motherboard	DEBIX Model C
Memory	1GB LPDDR4 (2GB optional)
Storage	8GB/16GB/32GB/64GB/128GB/256GB Micro SD card (eMMC optional)
OS	Ubuntu 22.04, Yocto-L6.1.22_2.2.0, Debian 12
I/O Interfaces	
Gigabit Ethernet	2 x Gigabit Ethernet ports, one supports TSN
Wi-Fi & Bluetooth	2.4GHz & 5GHz Wi-Fi and Bluetooth 5.2, external SMA antenna for Wi-Fi&BT
USB	1 x Type-C USB for DC 5V power input
	1 x Type-C USB as a USB OTG
	2 x USB 2.0 Host Type-A
Audio	1 x 3.5mm Headphone and Mic combo port
Slot	1 x Micro SD Slot
KEY	1 x RESET KEY
	1 x ON/OFF KEY
Mechanical & Environmental	
Material	Aluminum alloy
Dimension	93.47mm x 72.36mm x 30.15mm (±0.5mm)
Weight	192g (±0.5g)
Operating Temp.	-20°C to 70°C, -40°C to 85°C (optional)
Power Supply	
Power Adapter	DC 5V/2A

I/O Interfaces and Dimension:



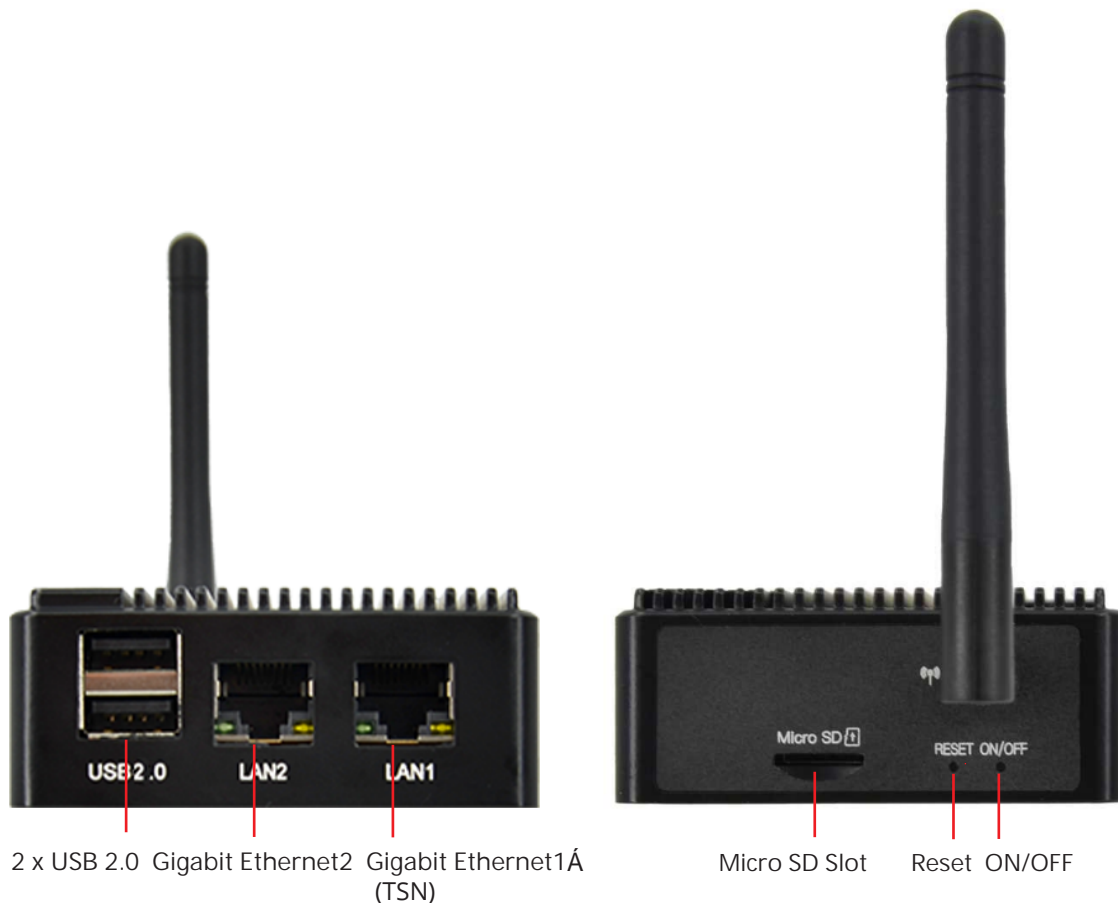

Safety Instruction:

To avoid malfunction or damage to this product please observe the following:

- Disconnect the device from the DC power supply before cleaning. Use a damp rag. Do not use liquid detergents or spray-on detergents.
- Keep the device away from moisture.
- During installation, put the device on a reliable table. It will be damaged if you drop it.
- Before connecting the power supply, ensure that the voltage is in the required range.
- Put the power cable in place to avoid stepping on it.
- If the device is not used for a long time, power it off to avoid damage caused by sudden overvoltage.
- For safety reasons, the device can only be disassembled by professional personnel.
- Do not place the device in a place where the ambient temperature is below -40 °C or above 85 °C. This will damage the machine. It needs to be kept in an environment at controlled temperature.

Contact Us:

Headquarters: DEBIX Technology Inc., 8345 Gold River Ct., Las Vegas, NV 89113, USA

Factory: 5-6/F., East Zone, Shunheda A2 Building, Liuxiandong Industrial Park, Xili, Nanshan Dist., Shenzhen, China

Email: info@debix.io

Website: www.debix.io

Community: <https://discord.com/invite/adaHHaDkH2>

