


DEBIX Model C

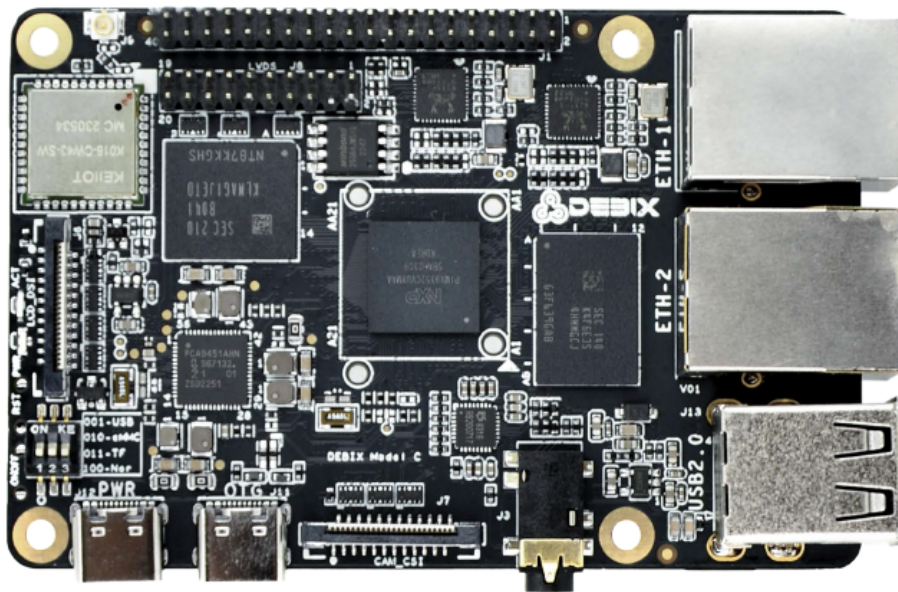

DEBIX Model C i.MX 93 Single Board Computer


Overview:

DEBIX Model C is the first DEBIX single board computer to feature the NXP i.MX 93, a power-optimized processor rating up to 1.7GHz with only 1 watt of power at full load consumption, and the Arm Ethos™-U65 microNPU enables developers to create more capable ML applications.

Engineered to deliver more energy-efficient and cost-effective solutions for intelligent edge computing, DEBIX Model C provides multiple extensible interfaces for IoT edge, contactless HMI, smart home, building control and industrial applications.

Main Features:




- NXP i.MX 93 processor: 1.7GHz, 1W (extended industrial grade, industrial grade and consumer grade processors for options);
- Advanced security with integrated EdgeLock® secure enclave;
- Ethos-U65 microNPU to bring MCU-class ML efficiency;
- General-purpose Cortex-M33 up to 250MHz for real-time and low-power processing;
- Supports system switching between Ubuntu 22.04 Server, Yocto-L6.1.36, Debian 12 Server;
- Supports cooperative work on FreeRTOS and Linux dual systems.

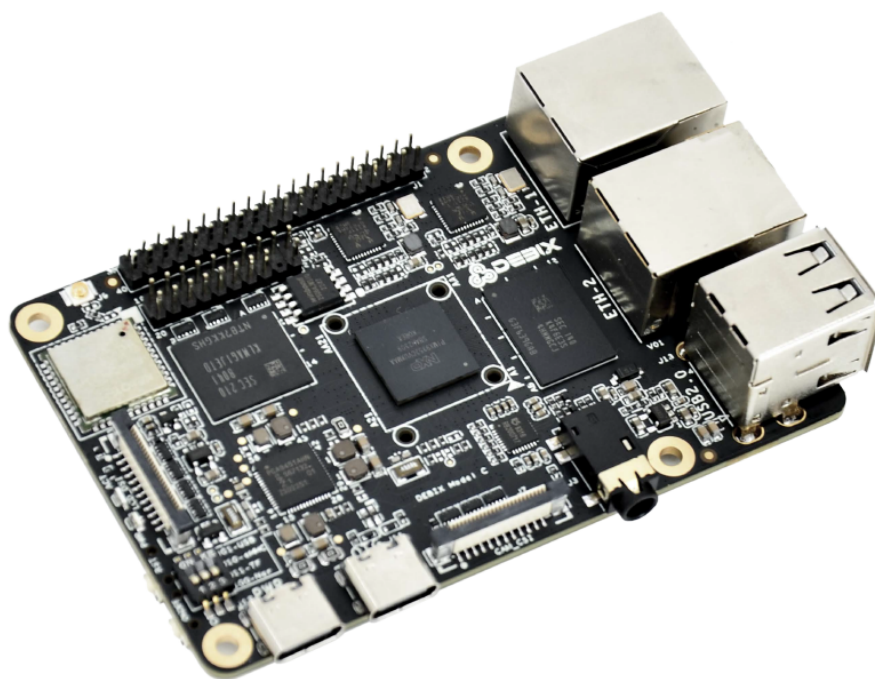

Specification:

| System | |
|----------------------------|--|
| CPU | NXP i.MX9352, 2 x Arm® Cortex®-A55 @1.7 GHz, 1 x Arm® Cortex®-M33 @250MHz, 1 x Arm® Ethos™-U65 microNPU @0.5TOPS. (i.MX 93 series CPU optional) |
| Memory | 1GB LPDDR4 (2GB optional) |
| Storage | Default: Micro SD card (Onboard 8GB/16GB/32GB/64GB/128GB/256GB eMMC optional) |
| OS | Ubuntu 22.04 Server, Yocto-L6.1.36, Debian 12 Server (also supports OpenWRT and FreeRTOS) |
| I/O Interfaces | |
| Gigabit Ethernet | 1 x Gigabit Ethernet port, support TSN and PoE power supply (need PoE power device module) 1 x Gigabit Ethernet port (POE power supply is not supported) |
| WIFI & BT | 2.4GHz & 5GHz WIFI IEEE 802.11a/b/g/n, BT5.2 |
| USB | 2 x USB 2.0 Host 1 x USB 2.0 OTG |
| Audio | 1 x Headphone and Mic combo port |
| Slot | 1 x Micro SD card slot |
| Expansion | |
| 40-Pin Double-Row Header | (1) 1 x I2C, 2 x USB 2.0 Host, 4 x 12bit ADC in, 1 x UART for system debug. (2) 6 x GPIO for default, can be reused as PWM, UART, SPI, I2C and CAN through software configuration. (3) 5V power supply in/out, 1.8V/3.3V@300mA power out, system reset, ON/OFF |
| LVDS | 1 x 720p60 LVDS, single channel 8bit |
| MIPI CSI | 1 x 1080p60 MIPI CSI (2-lane) |
| MIPI DSI | 1 x 1080p60 MIPI DSI (4-lane) |
| DIP Switch | 1 x 3-bit DIP Switch |
| Power Supply | |
| Power Supply | DC 5V/2A Type-C |
| Mechanical & Environmental | |
| Size | 85.0mm x 56.0mm (±0.5mm) |
| Operating Temp. | -20°C to 70°C (-40°C to 85°C optional) |
| Net Weight | 43g(±0.5g) |

I/O Interfaces:

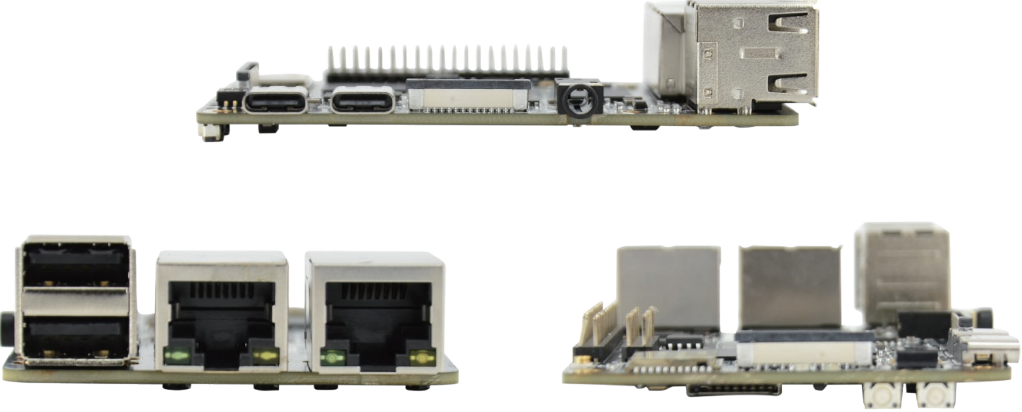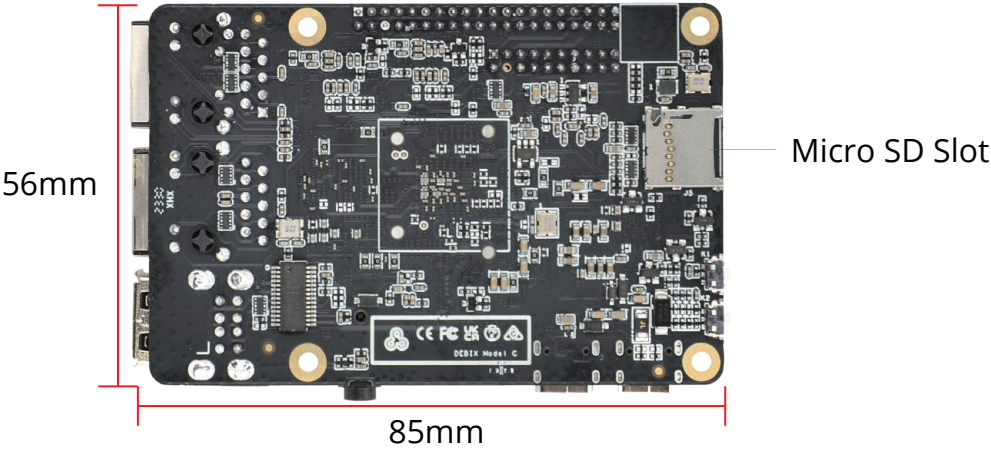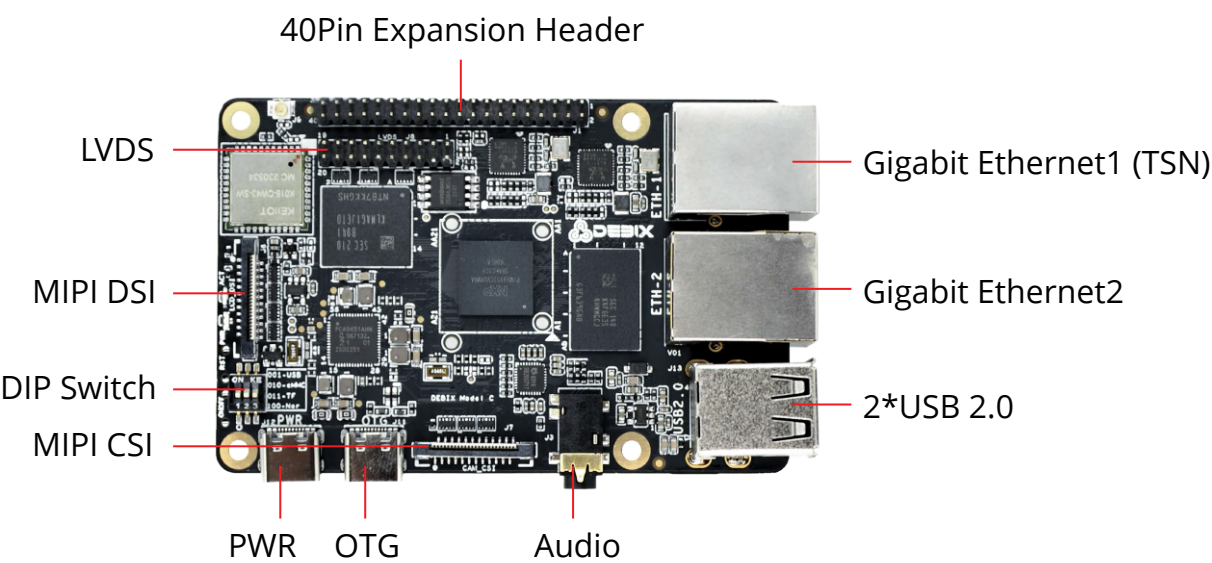

Ordering Codes:

| RAM LPDDR4 | eMMC Storage | PN for Model C -20°C~70°C | PN for Model C -40°C~85°C |
|------------|--------------|---------------------------|---------------------------|
| 1GB DDR | N/A | | Model C-I-D1E0 |
| | 8GB | Model C-D1E8 | Model C-I-D1E8 |
| | 16GB | Model C-D1E16 | Model C-I-D1E16 |
| | 32GB | Model C-D1E32 | Model C-I-D1E32 |
| | 64GB | Model C-D1E64 | Model C-I-D1E64 |
| | | | |
| 2GB DDR | N/A | | Model C-I-D2E0 |
| | 8GB | Model C-D2E8 | Model C-I-D2E8 |
| | 16GB | Model C-D2E16 | Model C-I-D2E16 |
| | 32GB | Model C-D2E32 | Model C-I-D2E32 |
| | 64GB | Model C-D2E64 | Model C-I-D2E64 |

Compatible with DEBIX's Accessories:

| Product | Model |
|----------------------------------|--|
| DEBIX Fanless Aluminum Enclosure | EMC-7090B Model C |
| SBC POE Board | EMB-AS-06 |
| DEBIX Camera Module | Camera 200A Camera 500A |
| DEBIX Display Screen | DEBIX TD050A DEBIX TD070A DEBIX TD101A |

Safety Instruction and Warnings:

General:

- Avoid exposure to water, moisture, and conductive surfaces while operating.
- Handle with care to avoid mechanical or electrical damage to the circuit board and connectors.
- Only handle the board by the edges when powered on to minimize the risk of electrostatic discharge damage.

Power:

- Use only a 5V/2A DC minimum external power supply that complies with relevant regulations and standards for your country.

Environment:

- Operate in a well-ventilated environment, even if using a case.
- Place on a stable, flat, non-conductive surface and avoid contact with conductive items.

Connections:

- Only connect compatible devices to the GPIO ports to avoid damage and warranty voiding.
- Use peripherals that comply with relevant standards for the country of use and ensure proper insulation and operation.

Additional notes:

- This summary is not exhaustive, please refer to the full User Manual for details.
- If you are unsure about any aspect of safety or operation, consult a qualified professional.

Contact Us:

Headquarters: DEBIX Technology Inc., 8345 Gold River Ct., Las Vegas, NV 89113, USA

Factory: 5-6/F., East Zone, Shunheda A2 Building, Liuxiandong Industrial Park, Xili, Nanshan Dist., Shenzhen, China

Email: info@debix.io

Website: www.debix.io

Community: <https://discord.com/invite/adaHHaDkH2>

